


POLABLE 142 EB

White Voided BOPP Film

- Features:
- Excellent opacity, gloss and stiffness
 - Orange peel effect after blow molding
 - Improved slip and anti-static characteristics for sheeting and die cutting
 - Special skin layer provides excellent adhesion with different kind of inks

Application: High stiff BOPP film for blow mold labeling, suitable for sheet-fed and roll-fed printing.

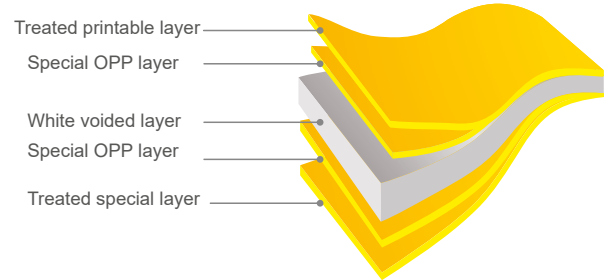

Specification	Test Method	Unit	Test Direction	105 μ
Wetting tension	ASTM D 2578	Dyne/cm	Treated Side	≥ 36
Tensile Strength	ASTM D 882	N/mm ²	MD	75
			TD	140
Elongation at break	ASTM D 882	%	MD	145
			TD	50
Thermal Shrinkage	ASTM D 1204	%	MD	≤ 4
			TD	≤ 2
Gloss	ASTM D 2457	%	-	23
Density	ASTM D1505	gr/m ³	-	0.73
Yield	ASTM D 4321	m ² / kg	-	13
Opacity	DIN 53146	%	-	80
Dynamic C.O.F	ASTM D 1894	-	Film - Film	0.3
		-	Film - Metal	0.25

MD: Machine direction, TD: Transverse direction

This film complies with the EU and FDA regulations. Specific documents are available upon request.

Polfilm does not guarantee the typical values. Any data included herein is based on the analysis of representative samples and not the actual product shipped. NO guarantee is made regarding information presented in this document. The user is solely responsible for all determinations regarding use and therefore Polfilm denies any responsibility for any loss or damage that may occur from the use of this information.

Polfilm strongly suggests that before any vast usage, make sure to study "Customer's Guide " and test our product in limited amounts.