


POLABLE 132 LIV

Both sides treated, one side matt and one side printable

White BOPP film

- Features:
- Excellent opacity, gloss and stiffness
 - Excellent lay-flat characteristics
 - Improved slip and anti-static characteristics for sheeting and die cutting
 - High adhesion skin layer provides excellent adhesion with solvent based, conventional off-set inks

Application: Solid White BOPP film for in-mold labeling, suitable for sheet-fed and roll fed printing. It can be used for other kinds of applications such as cut & stack as well.

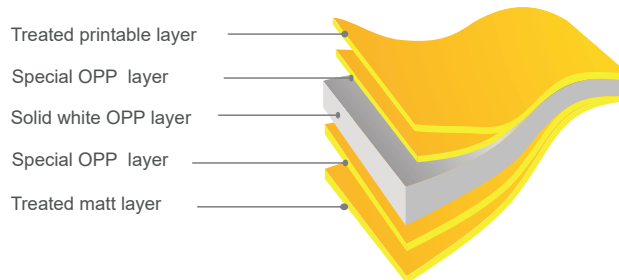

Specification	Test Method	Unit	Test Direction	57 μ
Wetting Tension	ASTM D 2578	Dyne/cm	Treated Side	≥ 38
Tensile Strength	ASTM D 882	N/mm ²	MD	120
			TD	240
Elongation at break	ASTM D 882	%	MD	200
			TD	40
Thermal Shrinkage	ASTM D 1204	%	MD	≤ 4
			TD	≤ 2
Gloss	ASTM D 2457	%	Glossy Side	50
Opacity	DIN 53146	%	-	80
Yield	ASTM D 4321	m ² /kg	-	18.4
Density	ASTM D 1505	gr/m ³	-	0.95
Unit weight	ASTM D 4321	gr/m ²	-	54.2
Dynamic C.O.F	ASTM D 1894	-	Film-Film	0.35
			Film-Metal	0.25

MD: Machine direction, TD: Transverse direction

Available thicknesses: All thicknesses between 45 - 57 μm can be produced upon request.

This film complies with the EU and FDA regulations. Specific documents are available upon request.

Polfilm does not guarantee the typical values. Any data included herein is based on the analysis of representative samples and not the actual product shipped. NO guarantee is made regarding information presented in this document. The user is solely responsible for all determinations regarding use and therefore Polfilm denies any responsibility for any loss or damage that may occur from the use of this information. Polfilm strongly suggests that before any vast usage, make sure to study "Customer's Guide " and test our product in limited amounts.